

KORIUM/KORIUM PLUS




Complete range of operative, executive and waiting armchairs with mesh flexible backrest or equipped with extra soft fixed cushion.

Seat: inner shell in beech-poplar multilayer thickness 13,5 mm., padding in cold injected expanded polyurethane density 40 kg/m³ with thickness between 4 and 6 cm.

Back: flexible holding frame in polyester PETG available in **black or grey** with 8 fixing connections



- for **KORIUM**: supporting polyester **mesh in different colors**.



- for **KORIUM PLUS**: the supporting polyester mesh is **black (D/222)** with an extra fixed cushionpadded in expanded polyurethane and upholstered as the seat.

Back support: connection between seat and back in painted steel with polypropylene cover.

Lumbar support adjustment: (on request): lumbar support system in integral expanded polyurethane with hand-regulation.



Armrests:



- **fixed:** in steel with upper-injection of black integral expanded polyurethane



- **fixed:** in die-cast polished aluminum padded and upholstered on the top



- **4d arms: adjustable, extendable, rotating and stretchable armrests:** in chromed steel with cover in polypropylene, adjustable in height 100 mm. Step by Step in 8 positions, extendable 70 mm in 9 positions, rotating from -30°inner-side till +30°outside, stretchable 40 mm.


Mechanisms:



- **Fixed plate: gas lift seat height adjustment** cone $\varnothing$ 28 mm, with height adjustable backrest
- **One lever synchron action "A"** made of steel (lever for height adjustment – button for synchronized movement) lockable in 5 positions or free floating with anti-shock system and tension adjustment



- **One lever synchron action "B"** made of steel (lever for height adjustment – button for synchronized movement) lockable in 5 positions or free floating with anti-shock system and tension adjustment) **and sliding system** for seat depth adjustment (for 5 cm)

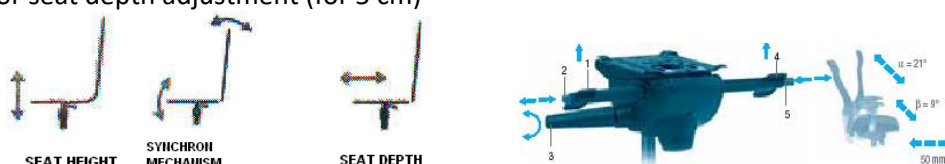

Bases			
	APS 5-star base in black reinforced nylon Ø 660 mm (Ansi-Bifma X5.1-1993/8)		AL7 5-star base in die-cast polished aluminum Ø 650 mm
	APG 5-star base in grey nylon Ø 675 mm		AL6 5-star base in die-cast polished aluminum Ø 654 mm
	AL9 5-star base in die-cast aluminum, aluminium grey painted Ø 650 mm		APW 5-star base in white nylon Ø 675 mm
	AL3 5-star base in die-cast polished aluminum Ø 654 mm with chromed gaslift		AL5 5-star base in die-cast polished aluminum Ø 654 mm with chromed gaslift
	AL4 (not for tilting versions) 4-star base in die-cast aluminum Ø 730 mm. with chromed feet and chromed gas-lift		AWW 5 star base in die cast aluminium white painted Ø 654 mm, with WHITE GASLIFT .
	ANN 5-star base in die cast aluminium black painted Ø 654 mm		APN 5 star base with steel inner frame 25x30 mm th.2 mm, Ø 670 mm, cover in black polypropylene. (Ansi-Bifma X5.1-1993/8)
	APP 5 star black nylon base Ø 680 with dynamic DUO glides in nylon/wood felt. For fixed versions only.		

Fixed frames: sled frame in steel tube, black painted (**AN**), aluminium grey painted (**AV**) or chromed (**ACC**).

PRODUCT IN ACCORDANCE WITH THE EUROPEAN STANDARDS EN 1335 – TYPE A

Dimensions:



February 2023