

KLIC



Multipurpose chair with arms.

Upholstered in fabrics or synthetic leathers “C” and “D” categories.

- Backrest:**
- ***version with black nylon backrest*** thickness min. 5 mm. max 24 mm.
 - ***version with grey nylon backrest*** thickness min. 5 mm. max 24 mm.

Seat: structure in steel with cold injection of expanded polyurethane thickness 45 mm.
density min. 60 kg/m³.


Fixed frame:

- **4-legs steel frame with arms:** painted aluminium (AV) or chromed frame (AC), thickness 2 mm
Ø 22mm.
- **sled steel base:** painted aluminium or chromed frame , thickness 2mm Ø 25mm

Trolley: on castors in black painted steel, to carry the stackable chairs (4-legs versions)



Dimensions:

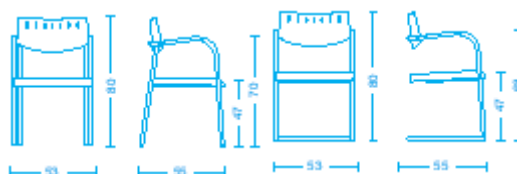

May 2019